






## SIRIUS 60

Plan Reference Symbol



### Multifunctional Surface Wall/Ceiling Downlight

The SIRIUS 60 has a 360° rotator which allows extensive adjustment range. Its clever and seamless integration with any surface makes this spotlight a top choice for both residential and commercial projects.

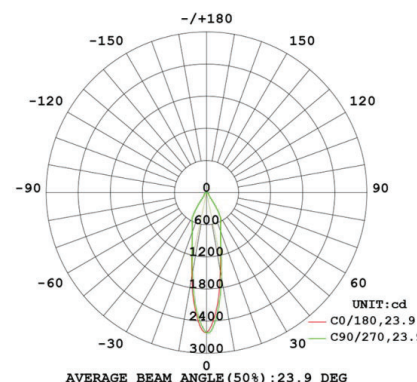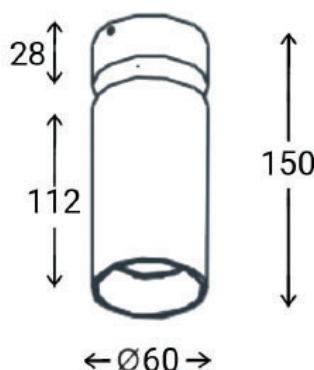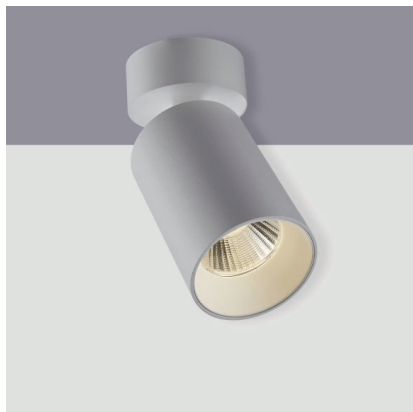

Luminaire Data	Standard	Special Order
Power	12W	
Luminous Flux	1356 Lumens	
Light Source	BRIDGELUX V10 ARRAY	
Colour Rendition Index (CRI)	90	
Colour Temperature	2700K	
Beam Angle	25°	33°, 50°
Ingress Protection Rating (IP)	IP20	
Dimmable	Yes, TRIAC	
Driver	Integrated 12W	
Directional	Yes, 350° Spot / Head Adjust 90°	
<b>Dimensions</b>		
Size	Ø 60 x 150mm	
Cut Out Size	N/A	
Minimum Ceiling Depth	N/A	
<b>General Data</b>		
Colour options	Sand White, Sand Black	Black, White, Gold Inner Ring
Warranty	5 year	

www.pleolight.com

ROI Office No. (+353) 1 293 6800  
ROI Mobile No. (+353) 87 255 4334  
UK Office No. +44 7387 272330

Technical data on this document is guidance only and is subject to change without prior notice. Measurements included on document are not exact and products sizes may differ slightly

