




KATRO

Plan Reference Symbol

Square Surface Downlight

The Katro is a recessed square downlight. With its slim profile its able to provide a sleek look to anywhere it is placed.

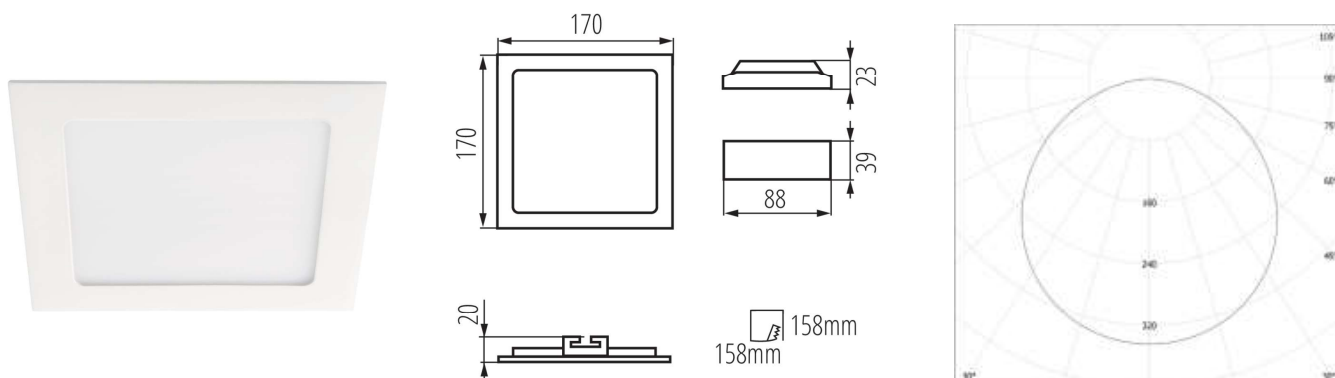

Luminaire Data

	Standard	Special Order
Power	12W	
Luminous Flux	780 Lumens	
Light Source	LED SMD	
Colour Rendition Index (CRI)	80	
Colour Temperature	4000K	
Beam Angle		
Ingress Protection Rating (IP)	IP44	
Dimmable	No	
Driver	Integrated	
Directional	No	

Dimensions

Size	170 x 170 x h30mm
Cut Out Size	N/A
Minimum Ceiling Depth	N/A

General Data

Colour options	graphite / white
Warranty	5 year

www.pleolight.com

ROI Office No. (+353) 1 293 6800
ROI Mobile No. (+353) 87 255 4334
UK Office No. +44 7387 272330

Technical data on this document is guidance only and is subject to change without prior notice. Measurements included on document are not exact and products sizes may differ slightly

